



Special Buckets

CD COAL DIGGING
LB LIGHT MATERIAL

CL COAL LOADING
WC WOODCHIP

SPECIAL BUCKETS INCREASE PRODUCTIVITY


Rockland has been manufacturing special buckets for over sixty years. Our engineers have been in coal yards, fertilizer plants, rock quarries, gravel operations, and all kinds of excavation jobs. They know special applications. They also understand loader linkage and what it takes to design a bucket that will increase productivity and deliver years of dependable service. Rockland buckets have earned a well-deserved reputation for performance and quality. If you have a special application, Rockland has a bucket guaranteed to increase productivity—and profits!



CD COAL DIGGING BUCKET



LB LIGHT MATERIAL BUCKET

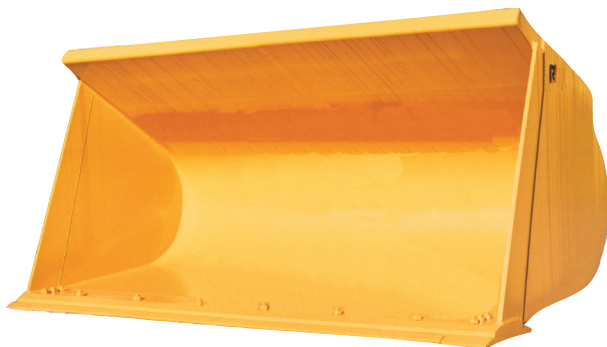

CL COAL LOADING



WC WOODCHIP BUCKET

CD COAL DIGGING BUCKETS

Smart coal operators know that to efficiently dig coal a bucket must have the proper shape. Coal should slide in and roll up in one smooth, continuous filling motion so that valuable time is not wasted trying to fill the bucket. Rockland CD Coal Digging Buckets are designed around the unique properties of coal. They dig and load the way a coal bucket should.

Whether it be loading at the seam or stockpile work, equip your loader with a Rockland CD bucket. Weight-saving, alloy steel construction is used throughout so bucket weight is reduced and capacity is increased. The CD bucket is equipped with reversible bolt-on edges. Turn your loader into a real coal loading machine by specifying a Rockland CD Coal Digging Bucket.



SPECIFICATIONS

Machine Category	20	30	30	30,40	30,40	40	40,50	50	50,60
Capacity (Yd ³)	3 <i>2.3</i>	3.5 <i>2.68</i>	3.75 <i>2.87</i>	4 <i>3.06</i>	4.5 <i>3.44</i>	4.75 <i>3.63</i>	5 <i>3.83</i>	5.5 <i>4.27</i>	6 <i>4.59</i>
Width (")	96 <i>2438</i>	106 <i>2692</i>	106 <i>2692</i>	120 <i>3048</i>	120 <i>3048</i>	120 <i>3048</i>	126 <i>3200</i>	126 <i>3200</i>	126 <i>3200</i>
Weight (lbs.)	2360 <i>1070</i>	2815 <i>1277</i>	2915 <i>1322</i>	3540 <i>1606</i>	3780 <i>1715</i>	4020 <i>1824</i>	4530 <i>2055</i>	4880 <i>2214</i>	5430 <i>2436</i>

Machine Category	60	60	60	60,70	70	70	70	70,80
Capacity (Yd ³)	6.5 <i>4.67</i>	7 <i>5.36</i>	7.5 <i>5.74</i>	8 <i>6.12</i>	8.5 <i>6.5</i>	9 <i>6.89</i>	9.5 <i>7.27</i>	10 <i>7.65</i>
Width (")	132 <i>3353</i>	132 <i>3353</i>	132 <i>3353</i>	136 <i>3454</i>	136 <i>3454</i>	136 <i>3454</i>	136 <i>3454</i>	144 <i>3638</i>
Weight (lbs.)	5880 <i>2667</i>	6480 <i>2939</i>	6680 <i>3030</i>	7130 <i>3234</i>	7380 <i>3348</i>	7880 <i>3574</i>	8280 <i>3756</i>	8775 <i>3980</i>

(mm/kg)


Specifications subject to change without notice.

LB LIGHT MATERIAL BUCKETS

Loading light material with a factory bucket amounts to paying your operators a full day's pay for half a day's work. It simply does not make sense to cheat yourself out of total machine productivity by using a smaller bucket than necessary.

Determine just how much more material you can handle every pass with a larger Rockland LB bucket. Then calculate the savings. Even if you only increase capacity by half a yard, the annual savings are tremendous—almost immediate payback!

All Rockland LB Light Material Buckets are specifically designed for the loader upon which they are to be mounted. Widths and capacities are carefully calculated so that machine performance is not compromised. LB buckets are designed and built for years of dependable service. Features like slope-bottom design to reduce bottom and corner wear, replaceable skid shoes, reversible bolt-on edges, and high-strength, heat-treated alloy plate base cutting edges all add up to quality and performance. Get the most from your machine every pass, every day. If you have a light material application, increase productivity by specifying a Rockland LB Light Material Bucket.

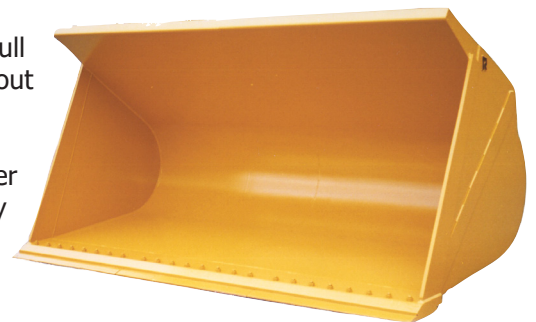

SPECIFICATIONS

Machine Category	5	5	10	10, 20,30	10, 20,30	10, 20,30	20,30	20,30	20,30	20,30	20,30	30,40	30,40
Capacity (Yd ³)	2 <i>1.53</i>	2.25 <i>1.72</i>	2.5 <i>1.91</i>	3 <i>2.3</i>	3.5 <i>2.68</i>	3.75 <i>2.87</i>	3.5 <i>3.2</i>	3.75 <i>3.43</i>	4 <i>3.06</i>	4.5 <i>3.44</i>	4.75 <i>3.63</i>	5 <i>3.83</i>	5.5 <i>4.21</i>
Width (")	90 <i>2286</i>	90 <i>2286</i>	90 <i>2286</i>	96 <i>2438</i>	100 <i>2540</i>	100 <i>2540</i>	106 <i>2692</i>	106 <i>2692</i>	106 <i>2692</i>	106 <i>2692</i>	106 <i>2692</i>	108 <i>2743</i>	108 <i>2743</i>
Weight (lbs.)	1200 <i>544</i>	1225 <i>556</i>	1525 <i>692</i>	2000 <i>907</i>	2150 <i>975</i>	2300 <i>1043</i>	2575 <i>1168</i>	2650 <i>1202</i>	2750 <i>1247</i>	2975 <i>1349</i>	3325 <i>1508</i>	3825 <i>1735</i>	3975 <i>1803</i>

Machine Category	30,40	50	50	50	60	60	60	60	60,70	60,70	60,70	70	70
Capacity (Yd ³)	6 <i>4.59</i>	6.5 <i>4.97</i>	7 <i>5.36</i>	7.5 <i>5.74</i>	8 <i>6.12</i>	8.5 <i>6.5</i>	9 <i>6.89</i>	9.5 <i>7.27</i>	10 <i>7.65</i>	10.5 <i>8.03</i>	11 <i>11.5</i>	11.5 <i>8.8</i>	12 <i>9.18</i>
Width (")	108 <i>2743</i>	120 <i>3048</i>	120 <i>3048</i>	120 <i>3048</i>	134 <i>3404</i>	134 <i>3404</i>	144 <i>3658</i>	144 <i>3658</i>	144 <i>3658</i>	144 <i>3658</i>	158 <i>4013</i>	158 <i>4013</i>	158 <i>4013</i>
Weight (lbs.)	4215 <i>1912</i>	4600 <i>2087</i>	5050 <i>2291</i>	5150 <i>2336</i>	5500 <i>2495</i>	6100 <i>2767</i>	6525 <i>2960</i>	6600 <i>2994</i>	6975 <i>3164</i>	7725 <i>3504</i>	7900 <i>3583</i>	8075 <i>3663</i>	8250 <i>3742</i>

Machine Category	70	70	70	70, 80,90	70, 80,90	70, 80,90	80,90	80,90	90	90
Capacity (Yd ³)	12.5 <i>9.56</i>	13 <i>9.95</i>	13.5 <i>10.33</i>	14 <i>10.71</i>	14.5 <i>11.09</i>	15 <i>11.48</i>	15.5 <i>11.86</i>	16 <i>12.24</i>	18 <i>16.46</i>	20 <i>18.29</i>
Width (")	158 <i>4013</i>	158 <i>4013</i>	158 <i>4013</i>	162 <i>4115</i>	162 <i>4115</i>	162 <i>4115</i>	162 <i>4115</i>	162 <i>4115</i>	178 <i>4521</i>	178 <i>4521</i>
Weight (lbs.)	8450 <i>3833</i>	8675 <i>3935</i>	8900 <i>4037</i>	10200 <i>4627</i>	10575 <i>4797</i>	10925 <i>4956</i>	11250 <i>5103</i>	11575 <i>5250</i>	11950 <i>5421</i>	12400 <i>5625</i>

(mm/kg)

Specifications subject to change without notice.

WC WOODCHIP BUCKETS

Woodchip handling requires a special bucket. It must be large enough to guarantee machine productivity. It must be rugged enough to stand up to the round-the-clock operations of a chip mill, and it must be designed with the right dump and carry angles.

Rockland WC Woodchip Buckets meet all the criteria for successful chip handling. Rockland WC buckets are equipped with reversible bolt-on edges. They are built entirely of high-strength, weight saving alloy steel. They are reinforced at all critical stress areas for years of dependable service. From the cutting edges to the attaching brackets, and from one end plate to the other, they are designed to perform and built to last. Chip people from Maine to Mississippi and from Florida to Alaska have specified Rockland WC Woodchip Buckets because they know Rockland WC Woodchip Buckets perform. Specify one for your machine—you will be glad you did.



SPECIFICATIONS

Machine Category	20	20	20	20	30	30	30	40	40	40	40	40	50	50
Capacity (Yd ³)	5 <i>3.83</i>	5.5 <i>4.21</i>	6 <i>4.59</i>	6.5 <i>4.97</i>	7 <i>5.36</i>	7.5 <i>5.74</i>	8 <i>6.12</i>	8.5 <i>6.5</i>	9 <i>6.89</i>	9.5 <i>7.27</i>	10 <i>7.65</i>	10.5 <i>8.03</i>	11 <i>8.42</i>	11.5 <i>8.79</i>
Width (")	128 <i>5253</i>	128 <i>5253</i>	130 <i>3302</i>	130 <i>3302</i>	136 <i>3454</i>	136 <i>3454</i>	136 <i>3454</i>	140 <i>3356</i>	140 <i>3356</i>	140 <i>3356</i>	140 <i>3356</i>	140 <i>3356</i>	150 <i>3810</i>	150 <i>3810</i>
Weight (lbs.)	2970 <i>1347</i>	3070 <i>1392</i>	3230 <i>1465</i>	3380 <i>1533</i>	3800 <i>1724</i>	3850 <i>1746</i>	4050 <i>1837</i>	4710 <i>2136</i>	5110 <i>2318</i>	5210 <i>2363</i>	5360 <i>2431</i>	5510 <i>2499</i>	5675 <i>2574</i>	5775 <i>2620</i>

Machine Category	50	50	50	60	60	60	60	60	60	70	70	70	70
Capacity (Yd ³)	12 <i>9.18</i>	12.5 <i>9.56</i>	13 <i>9.95</i>	13.5 <i>10.33</i>	14 <i>10.71</i>	14.5 <i>11.09</i>	15 <i>11.48</i>	15.5 <i>11.86</i>	16 <i>12.24</i>	17 <i>13.01</i>	18 <i>13.77</i>	19 <i>14.54</i>	20 <i>15.3</i>
Width (")	150 <i>3810</i>	150 <i>3810</i>	150 <i>3810</i>	165 <i>4191</i>	165 <i>4191</i>	165 <i>4191</i>	170 <i>4310</i>	170 <i>4310</i>	170 <i>4310</i>	174 <i>4420</i>	178 <i>4521</i>	178 <i>4521</i>	186 <i>4724</i>
Weight (lbs.)	5925 <i>2688</i>	5975 <i>2710</i>	6150 <i>2790</i>	6860 <i>3112</i>	7010 <i>3180</i>	7260 <i>3293</i>	8575 <i>3890</i>	8825 <i>4003</i>	9075 <i>4116</i>	11200 <i>5080</i>	12500 <i>5670</i>	12875 <i>5840</i>	13250 <i>6010</i>

(mm/kg)

Specifications subject to change without notice.

CL COAL LOADING BUCKETS

To be productive when handling coal you need the right bucket. Rockland CL Coal Loading Buckets are the right tool for the job. Each bucket is specifically designed for the loader and application. Widths and capacities are carefully coordinated to provide optimal performance.

Rockland CL Coal Loading Buckets feature a sloped bottom design which provides smooth loading, reduced bottom wear, and strength to match the loader. They are equipped with bolt-on, replaceable skid shoes and bolt-on cutting edges as standard equipment.

Truly designed to produce and built to last. You get the very best available with Rockland CL Coal Loading Buckets - the advantage of combining over 50 years of experience, and modern innovations such as computerized stress testing and lightweight, high-strength, weight saving alloy steels.



SPECIFICATIONS

Machine Category	5	5	10	10, 20,30	10, 20,30	10, 20,30	20,30	20,30	20,30	20,30	20,30	30,40	30,40
Capacity (Yd ³)	2 <i>1.53</i>	2.25 <i>1.72</i>	2.5 <i>1.91</i>	3 <i>2.3</i>	3.5 <i>2.68</i>	3.75 <i>2.87</i>	3.5 <i>3.2</i>	3.75 <i>3.43</i>	4 <i>3.06</i>	4.5 <i>3.44</i>	4.75 <i>3.63</i>	5 <i>3.83</i>	5.5 <i>4.21</i>
Width (")	90 <i>2286</i>	90 <i>2286</i>	90 <i>2286</i>	96 <i>2438</i>	100 <i>2540</i>	100 <i>2540</i>	106 <i>2692</i>	106 <i>2692</i>	106 <i>2692</i>	106 <i>2692</i>	106 <i>2692</i>	108 <i>2743</i>	108 <i>2743</i>
Weight (lbs.)	1200 <i>544</i>	1225 <i>556</i>	1525 <i>692</i>	2000 <i>907</i>	2150 <i>975</i>	2300 <i>1043</i>	2575 <i>1168</i>	2650 <i>1202</i>	2750 <i>1247</i>	2975 <i>1349</i>	3325 <i>1508</i>	3825 <i>1735</i>	3975 <i>1803</i>

Machine Category	30,40	50	50	50	60	60	60	60	60,70	60,70	60,70	70	70
Capacity (Yd ³)	6 <i>4.59</i>	6.5 <i>4.97</i>	7 <i>5.36</i>	7.5 <i>5.74</i>	8 <i>6.12</i>	8.5 <i>6.5</i>	9 <i>6.89</i>	9.5 <i>7.27</i>	10 <i>7.65</i>	10.5 <i>8.03</i>	11 <i>11.5</i>	11.5 <i>8.8</i>	12 <i>9.18</i>
Width (")	108 <i>2743</i>	120 <i>3048</i>	120 <i>3048</i>	120 <i>3048</i>	134 <i>3404</i>	134 <i>3404</i>	144 <i>3658</i>	144 <i>3658</i>	144 <i>3658</i>	144 <i>3658</i>	158 <i>4013</i>	158 <i>4013</i>	158 <i>4013</i>
Weight (lbs.)	4215 <i>1912</i>	4600 <i>2087</i>	5050 <i>2291</i>	5150 <i>2336</i>	5500 <i>2495</i>	6100 <i>2767</i>	6525 <i>2960</i>	6600 <i>2994</i>	6975 <i>3164</i>	7725 <i>3504</i>	7900 <i>3583</i>	8075 <i>3663</i>	8250 <i>3742</i>

Machine Category	70	70	70	70, 80,90	70, 80,90	70, 80,90	80,90	80,90	90	90
Capacity (Yd ³)	12.5 <i>9.56</i>	13 <i>9.95</i>	13.5 <i>10.33</i>	14 <i>10.71</i>	14.5 <i>11.09</i>	15 <i>11.48</i>	15.5 <i>11.86</i>	16 <i>12.24</i>	18 <i>16.46</i>	20 <i>18.29</i>
Width (")	158 <i>4013</i>	158 <i>4013</i>	158 <i>4013</i>	162 <i>4115</i>	162 <i>4115</i>	162 <i>4115</i>	162 <i>4115</i>	162 <i>4115</i>	178 <i>4521</i>	178 <i>4521</i>
Weight (lbs.)	8450 <i>3833</i>	8675 <i>3935</i>	8900 <i>4037</i>	10200 <i>4627</i>	10575 <i>4797</i>	10925 <i>4956</i>	11250 <i>5103</i>	11575 <i>5250</i>	11950 <i>5421</i>	12400 <i>5625</i>

(mm/kg)

Specifications subject to change without notice.

INSTALLATION INFORMATION

All Rockland special buckets mount in place of the standard buckets using factory pins or specified coupler brackets.

WARRANTY

Rockland Special Buckets are guaranteed against failure due to defective design, materials or workmanship for a period of two years or 4000 hours.



Distributed by:

ROCKLAND MANUFACTURING CO.
P O BOX 5
800-458-3773
BEDFORD, PA 15522
www.rocklandmfg.com